

# Platform Lifts

## LIFT COLOUR

Can be painted in any RAL colour from the RAL Classic chart.

## DOORS

2 different door types to choose from.

## GLASS

4 different glass types to choose from.




## FLOOR


9 different floorings to choose from.




## Aritco 4000



**Size: 580 x 805mm**  
Rated load: 250 kg/2 persons




**Size: 880 x 805mm**  
Rated load: 250 kg/2 persons




**Size: 1080 x 805mm**  
Rated load: 250 kg/2 persons


## Aritco 6000




**Size: 1000 x 1480mm**  
Rated load: 410 kg/5 persons




**Size: 1100 x 1480mm**  
Rated load: 410 kg/5 persons




**Size: 900 x 1040mm**  
Rated load: 250 kg/2 persons



**Size: 900 x 1280mm**  
Rated load: 410 kg/5 persons



**Size: 900 x 1480mm**  
Rated load: 410 kg/5 persons



**Size: 1000 x 1280mm**  
Rated load: 410 kg/5 persons

## Product summary

MODEL	TYPE OF LIFT	INSTALLATION		POWER SUPPLY V		DRIVE SYSTEM Patented screw & nut system	MAXIMUM RATED SPEED m/s	MINIMUM TOP HEIGHT mm	TRAVEL HEIGHT mm	NUMBER OF FLOORS	CONTROL FROM CARRIER CONTROL PANEL	EMERGENCY LOWERING	TECHNICAL COMPLIANCE
Aritco 4000	Home Lift intended for installation in private homes	Recessed 50mm below floor	Direct on floor with 50mm ramp	230V 1-phase		1.5kW motor	0.15	2,300	250-13,000	2-6	Hold to run - press & hold	Battery powered	European Machine Directive 2006/42/EC European standard 81-41
Aritco 6000				230V 1-phase	400V 3-phase	2.2kW motor		2,240					

# Platform Lifts

## Aritco 7000

### LIFT COLOUR

Can be painted in any RAL colour from the RAL Classic chart.


### GLASS

4 different glass types to choose from.




### FLOOR


9 different floorings to choose from.




Size: 900 x 1040mm  
Rated load: 250 kg/2 pers.  
Wheelchair: –




Size: 900 x 1280mm  
Rated load: 410kg/5 pers.  
Wheelchair: Lone user or type A\*




Size: 900 x 1480mm  
Rated load: 410,500kg/5-6 pers.  
Wheelchair: A or B with attendant\*




Size: 1000 x 1280mm  
Rated load: 410kg/5 pers.  
Wheelchair: Lone user or type A\*




Size: 1000 x 1480mm  
Rated load: 410,500kg/5-6 pers.  
Wheelchair: A or B with attendant\*



Size: 1100 x 1480mm  
Rated load: 410,500kg/5-6 pers.  
Wheelchair: A or B with attendant, adjacent entry\*

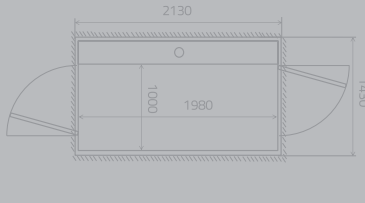


Size: 1000 x 1980mm  
Rated load: 500kg/6 pers.  
Wheelchair: A or B with attendant\*

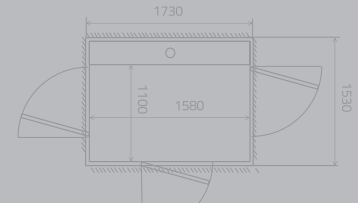


Size: 1100 x 1580mm  
Rated load: 500kg/6 pers.  
Wheelchair: A or B with attendant, adjacent entry\*

## Aritco 9000



Size: 1000 x 1400mm  
Rated load: 400kg/5 pers.  
Wheelchair: A or B with attendant\*

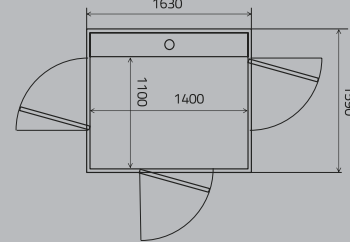

Size: 1100 x 1400mm  
Rated load: 400kg/5 pers.  
Wheelchair: A or B with attendant, adjacent entry\*

\* National guidelines may apply. Wheelchair Type A and B according to EN 12183/EN 12184.

## Product summary

MODEL	TYPE OF LIFT	INSTALLATION		POWER SUPPLY V		DRIVE SYSTEM Patented screw & nut system	MAXIMUM RATED SPEED m/s	MINIMUM TOP HEIGHT mm	TRAVEL HEIGHT mm	NUMBER OF FLOORS	CONTROL FROM CARRIER CONTROL PANEL	EMERGENCY LOWERING	TECHNICAL COMPLIANCE
Aritco 7000	Platform Lift intended for installation in public environments	Recessed 50mm below floor	Direct on floor with 50mm ramp	230V 1-phase	400V 3-phase	2.2kW motor	0.15	2,240	250-13,000	2-6	Hold to run – press & hold	Battery powered	European Machine Directive 2006/42/EC European standard 81-141
Aritco 9000		Recessed 75mm below floor	Direct on floor with ramp	400V 3-phase		3kW motor		2,400	2,150 <sup>1</sup> -13,000	2-6	Press one time to operate lift		European Machine Directive 2006/42/EC

<sup>1</sup> For opposite entry, 2,300mm when doors on same side.